

# “e” SERIES CLIP




The “e” series clip with its unique geometric design offers a lightweight, low cost rail fastener. Spring and torsion work together to provide a high clamping force, excellent resistance to rail rollover and longitudinal restraint.

The “e” clip is driven parallel to the rail and is easily installed, manually with standard track tools or mechanically with magazine fed, high speed, automatic production equipment.



**SPECIFICATIONS:**

- Made from high spring steel alloy
- Bar diameter: 20mm
- Approximate shipping weight: 1.7 lbs.
- Normally packed 50 to a bag
- P/N ECL-2055 (right hand)
- P/N ECL-2056 (left hand)

Clip	"e" 2055
Bar Diameter	20 mm
Nominal Toe Load	2,750 lbs.
Working Deflection	7/16"
Nominal Rail Seat Clamping Force	5,500 lbs.
Surface Area in contact with insulator or rail	.82 sq. in.

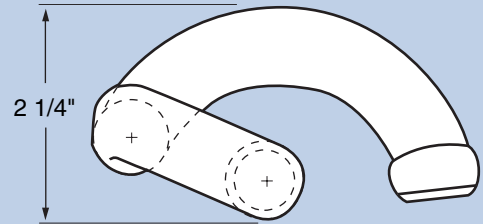

The "e" clip design utilizes the toe to bear on the rail base. The toe is flattened to provide a large bearing area on the rail or insulator.

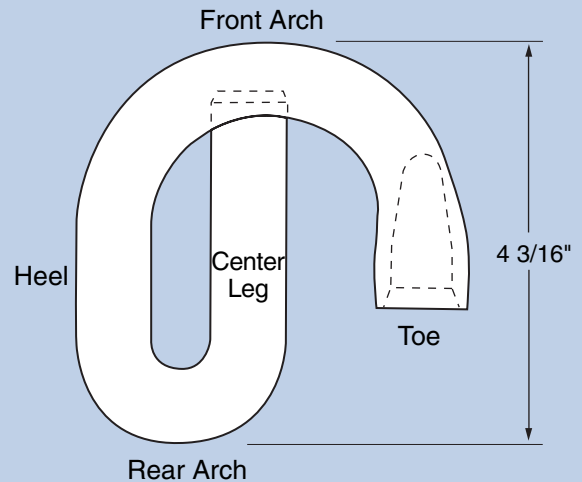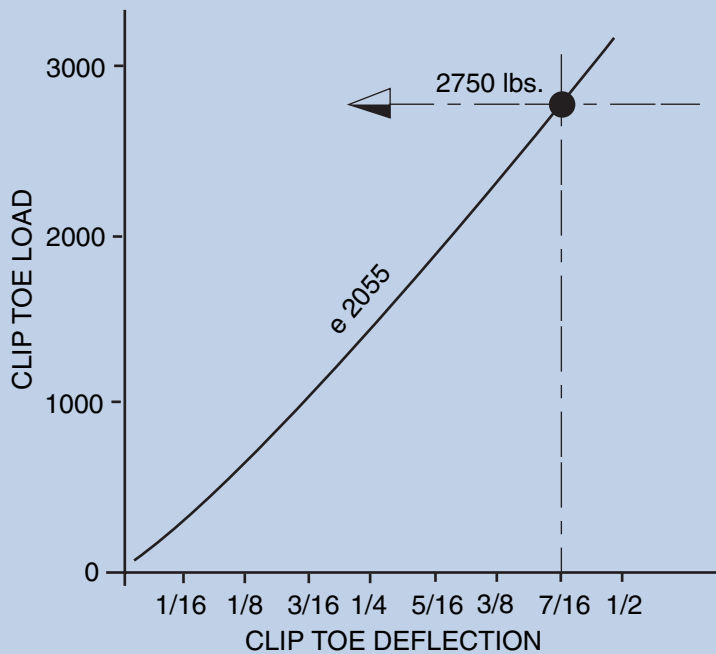

Chamfered center leg allows easy setting and driving.

[www.pandrolusa.com](http://www.pandrolusa.com)



Pandrol USA, LP  
 501 Sharptown Road  
 P.O. Box 367  
 Bridgeport, NJ 08014  
 (856) 467-3227  
 (800) 221-CLIP  
 FAX (856) 467-2994

**ISO 9001: 2000 Certified**